

1MP CAMERA

GE-1D-PHS



GE-1D-PHS



Shop No. 338/1, G.M. Complex, Ganthipuram Sixth St,
Gandipuram, Coimbatore, Tamil Nadu 641012




+0 98433 59251



nidhienterprisesce@gmail.com
www.grandeye.net

Introduction

GE-1D-PHS The camera is suitable for the scenes which requires high definition image display such as finance, telecommunications, government, schools, shops, airports, factories and hotels and so on.

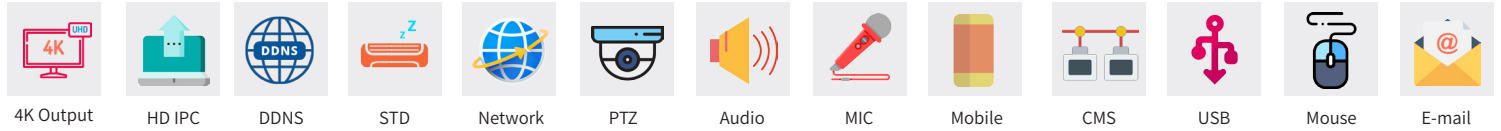

Specification

Model		GE-1D-PHS
Application Scene	Image Sensor	1/2.9inch CMOS
	Resolution	2M
	Image Size	1920x1080
	Video Output	AHD/TVI/CVI/CVBS
	Image System	PAL/NTSC920×1080/1280×1024/1024×768
	Electronic Shutter	TVI/CVI/AHD:1080P Lite,720P, WD1 real time
	IR Distance	10-20m
	Frame Rate	30FPS(60Hz) 25FPS(50Hz)
	Min. Illumination	0lux IR ON
	Lens	3.6 mm
	Lens Mount	M12
	S / N Ratio	≥52dB AGC OFF
	Ingress Protection	IP54
	Functions	Function Control
Day & Night		ICR
Digital WDR		Yes
Digital NR		Yes
AGC		Yes
Auto White Balance		Yes
BLC		Yes
Front Light Compensation		Yes
Defog		No
HLC		No
Sharpness		Yes
Mirror		Yes
Smart IR		Yes
Image Setting		Auto
Language	Chinese / English	
Defect Correction	Yes	
Angle Adjustment Case	Any angle	
Others	Power Supply	DC12V(±10%)
	Power Consumption	Day : <65 mA ; Night : <240 mA
	Working Environment	-20 °C , ~ 50 °C , 10% ~ 90% humidity
	Dimensions (mm)	71mm×71mm×156mm

Characteristics

- ❖ 720p real time image.
- ❖ 1080P real time image, high resolution, true color84CH DVR support
- ❖ 4 kinds of standard and lossless high-definition video outputs8 / 16
- ❖ Up to 1000 TVL resolution
- ❖ CMOS progressive scan, perfectly capture the moving object16 CH
- ❖ Support OSD menu AHD/CVI/TVI/CVBS
- ❖ High speed, long distance, real time transmission
- ❖ Auto color to B / W at low illuminationstyle operation by mouse
- ❖ Support ICR switch, true day / night
- ❖ Support noise reduction function
- ❖ 10-20m IR night view distance
- ❖ IP66 Plastic body and Weather proof
- ❖ Support COC
- ❖ Support 960H CVBS output

Dimensions

