


**2MP H.265 NVR**

**GE-NVR 5132-ALS2**



**GE-NVR 5132-ALS2**

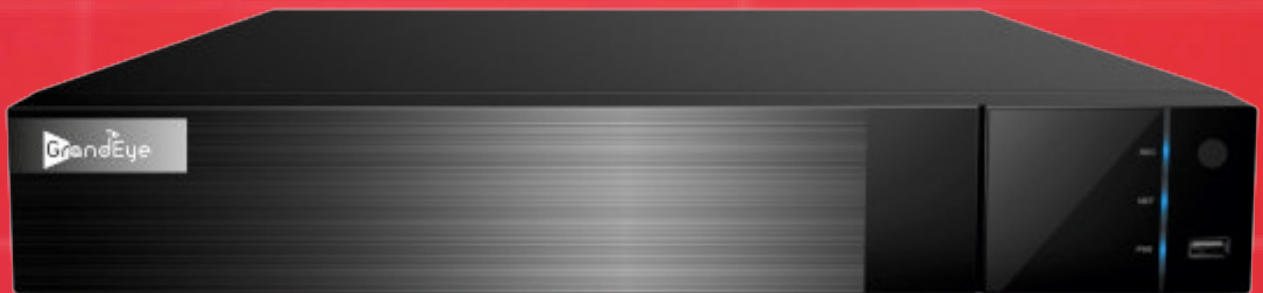

Shop No. 338/1, G.M. Complex, Ganthipuram Sixth St,  
Gandipuram, Coimbatore, Tamil Nadu 641012



+0 98433 59251




nidhienterprisesbbe@gmail.com  
www.grandeye.net

# GE-NVR 5132-ALS2

## Introduction

GE-NVR 5132-ALS2 series are All CH 5MP / 4MP / 3MP / 1080P / 960P / 720P high definition NVRs, which adopt the most advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system. TD-3200H1-C series support 4 / 8 CH IP input, simultaneous 4 / 8 CH playback, and 1080P high definition display. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.

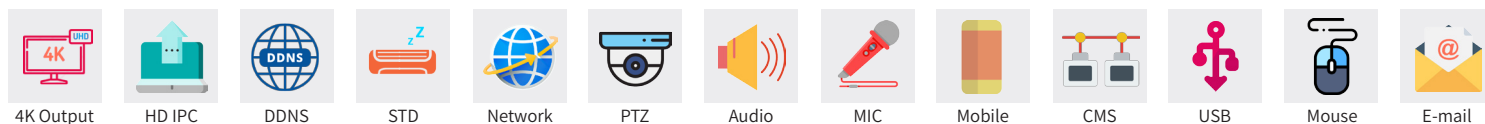

Specification		GE-NVR 5132-ALS2	GE-NVR 5132-ALS4	GE-NVR 5132-ALS8	GE-NVR 5164-ALS4
Model					
System	Compression	Standard H.265 / MPEG4			
	OS	Embedded Linux			
Video	Network Input	32 CH IPC input	32 CH IPC input	32 CH IPC input	64CH IPC input
	Network Bandwidth Access	80Mbps	80Mbps	80Mbps	80Mbps
	Network Access Format	5MP / 4MP / 3MP / 1080P / 960P / 720P@25 / 30fps			
	Output	HDMI × 1 : 4k x 2K / 1920 x 1080 / 1280 × 1024 (HDMI-VGA cable optional, 1920 × 1080 / 1280 x 1024)			
Audio	Network Input	32 CH IPC, audio	32 CH IPC, audio	32 CH IPC, audio	64 CH IPC, audio
	2-way Audio	No	No	No	No
	Local Output	RCA × 1			
Record	Record Stream	Dual stream recording			
	Resolution	5MP / 4MP / 3MP / 1080P / 960P / 720P			
	Mode	Manual, timer, motion, sensor			
Playback	Simultaneous Playback	Max 32 CH	Max 32 CH	Max 32 CH	Max 64 CH
	Search	Time slice / time / event / tag search			
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events			
	Function	Play, pause, FF, FB, digital zoom, etc.			
Alarm	Mode	Manual, sensor, motion, exception			
	Input	No local input, 4 CH IPC alarm, input	4 CH local input, 8 CH IPC alarm, input	4 CH local input, 16 CH IPC alarm,	4 CH local input, 16 CH IPC alarm,
	Output	No	No	No	No
	Triggering	Record, snap, preset, e-mail, etc.			
Network	Interface	RJ45 10 / 100 Mbps × 1			
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP			
	Web Client	Max 10 users online			
Mobile OS Device	OS	iOS, Andriod			
Storage	HDD	SATA × 1			SATAx2
	Local Backup	U disk, USB mobile HDD			
Backup	Network Backup	Yes			
	USB	USB 2.0 × 2 ( one in the front panel and the other in the rear panel )			
Port	Remote Controller	Optional			
	Power Supply	DC 12V			
Others	Consumption	≤ 5W ( without HDD )			
	Dimensions (mm)	255 210 42 ( W D H ), 300 × 270 × 55 ( W × D × H ) 300 × 248 × 52 ( W × D × H )			
	Work Environment	-10 ~ 50 C, 10% - 90% humidity			

- ## Characteristics
- ❖ Support All CH 5MP / 4MP / 3MP / 1080P / 960P / 720P / IP input
  - ❖ Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
  - ❖ Intuitive and user-friendly Graphic User Interface ( GUI ), Windows style operation by mouse
  - ❖ Multi-mode recording: manual / timer / motion / sensor  
Playback : 4 / 8 / 16 CH simultaneous playback
  - ❖ Search : time slice, time, event ( manual, sensor, motion ), tag search
  - ❖ Express and flexible backup via USB, network and so on
  - ❖ Pentaplex : preview, record, playback, backup and remote access
  - ❖ DHCP, DDNS, PPPoE network protocol and CMS supported
  - ❖ Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
  - ❖ Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
  - ❖ Multi-user online simultaneously
  - ❖ Authorization management, log view and device status view  
4K output, true high resolution display
  - ❖ Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
  - ❖ Support NAT function and QRCode scanning by mobile phone and PAD
  - ❖ Powerful smart phone & Pad surveillance with iOS and Andriod OS

## Dimensions

